



CLOTSEUL


WWW.CLOTSEUL.FR

French manufacturer since 1938


ELECTRIC FENCING



It's the **KNOW-HOW**
of the oldest French manufacturer
of Energizers for the farmers
of the 21st century.

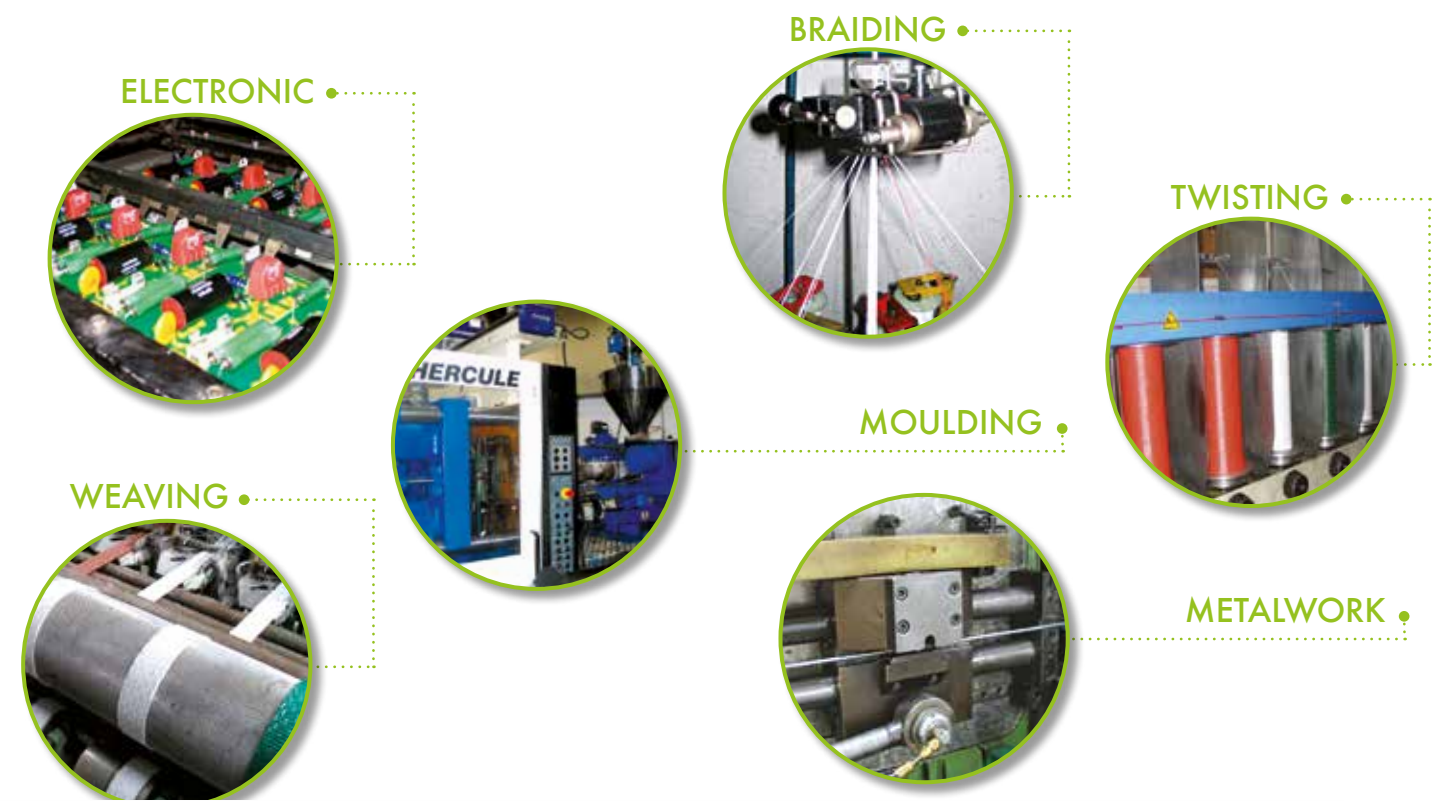

INTELLIGENCE and POWER with COMPLETE SECURITY (meeting the A12 standard)

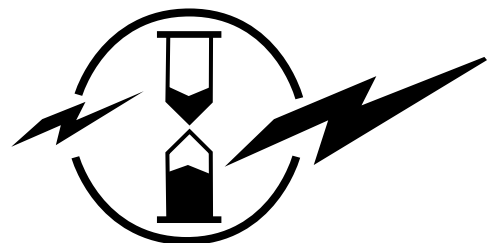

SIC 15

Code : 76 100 102



Control of the energy sent to the fence line



- LCD screen indicating :
- Output voltage
 - Energy in Joules
 - Level of power (1 to 5)
 - Resistance on the fence line



	SIC 15
Input Voltage	230 V - 50 Hz
Consumption in Watts	20 à 64 W maxi
Voltage	15000 V
Stored energy in Joules	30 J
Energy in Joules (EU standard)	15 J
Maximum fence length in Km	400 Kms
Visual display shows line conditions	✓
Loss autocompensator	✓
Overvoltage protection	✓
Size of UV protected ABS case	290 x 170 x 295
Weight	5.4 kgs

3 year warranty

SIC 15 - the most powerful high-tech energizer

- **Managed by microprocessor**
Bi-Advanced technology with double transformer, allows a maximum voltage of 15000 V and 3500 V at 50 Ohms.
- 15 Joules in 1 pulse.
- 5 levels of power to compensate precisely the loss on the fence line.
- Low consumption on normal conditions.
- **DELIVERS ITS MAXIMUM POWER IN EXTREME CONDITIONS** (such as vegetation, very long fences).

SIC 10

Code : 76 100 104



SIC 8

Code : 76 100 105



	SIC 10	SIC 8
Input Voltage	230 V 50 Hz	230 V 50 Hz
Consumption in Watts	18 à 58 W maxi	15 à 55 W maxi
Voltage	12 000 V	12 000 V
Stored energy in Joules	20 J	16 J
Energy in Joules (EU standard)	10 J	8 J
Maximum fence length in Km	370 Kms	350 Kms
Visual display shows line conditions	✓	✓
Loss autocompensator	UBI	Delayed effect
Overvoltage protection	✓	✓
Size of UV protected ABS case	290 x 170 x 295	290 x 170 x 295
Weight	5.2 kgs	4.8 kgs

3 year warranty

JARDIN

Code : 76 100 029



SIC 3

Code : 76 100 030



SIC 5

Code : 76 100 031



SIC 6

Code : 76 100 103



SIC 6 BI-POWER

Code : 76 100 032



SIC 7

Code : 76 100 044



	Input voltage	Consumption in Watts	Voltage	Maximum energy per pulse in Joules	Energy in Joules (EU standard)	Maximum length of fence	Visual display shows line conditions	Overvoltage protection
JARDIN Code : 76 100 029	230 V	2.5 W	7200 V	1 J	0.8 J	8 Km	X	
SIC 3 Code : 76 100 030	230 V	5 W	9000 V	1,6 J	1.2 J	18 Km	X	X
SIC 5 Code : 76 100 031	230 V	10 W	10 000 V	2,4 J	1.8 J	70 Km	X	X

3 year warranty

	Input voltage	Consumption in Watts	Voltage	Maximum energy per pulse in Joules	Energy in Joules (EU standard)	Maximum length of fence	Visual display shows line conditions	Overvoltage protection
SIC 6 Code : 76 100 103	230 V	12 W	13500 V	9 J	4.6 J	210 Km	X	X
SIC 6 Bi-power Code : 76 100 032	230 V	12 W	11 000 V 9000 V	7 J	5 J	230 Km	X	X
SIC 7 Code : 76 100 044	230 V	15 W	15 000 V	8 J	5 J	270 Km	X	X

3 year warranty



12 VIC 355

Code : 76 100 033



12 VIC 255

Code : 76 100 037



CLOVIC 355

Code : 76 100 111



CLOVIC 255

Code : 76 100 110



12 VIC GG

Code : 76 100 013



12 VIC

Code : 76 100 010



CLOVIC 12 GG

Code : 76 100 109



CLOVIC 12

Code : 76 100 108



	Input voltage	Consumption in mA	Voltage	Maximum energy per pulse in Joules	Maximum length of fence	Visual light shows line conditions	Visual light shows voltage of the battery	Possible to add solar panel	Two levels of power	Recommended battery
12 VIC 355 Code : 76 100 033	12 V	120/350	15000 V	4.85 J	75 Km	X	X	X	Variator of power	80 Ah
12 VIC 255 Code : 76 100 037	12 V	80/250	12000 V	4.55 J	65 Km	X	X	X	Variator of power	80 Ah
12 VIC GG Code : 76 100 013	12 V	120	10000 V	3.55 J	50 Km	X	X	X		80 Ah
12 VIC GG 2 power Code : 76 100 021	12 V	80/120	10000 V	3.55 J	50 Km	X	X	X	X	80 Ah
12 VIC Code : 76 100 010	12 V	75	9000 V	2.55 J	30 Km	X	X	X		60 Ah
12 VIC 2 power Code : 76 100 018	12 V	40/75	9000 V	2.55 J	30 Km	X	X	X	X	60 Ah

3 year warranty

	Input voltage	Consumption in mA	Voltage	Maximum energy per pulse in Joules	Maximum length of fence	Visual light shows line conditions	Visual light shows voltage of the battery	Possible to add solar panel	Two levels of power	Recommended battery
CLOVIC 355 Code : 76 100 111	12 V	120/350	15000 V	4.85 J	75 Km	X	X	30 W	Variator of power	80 Ah
CLOVIC 255 Code : 76 100 110	12 V	80/250	15000 V	4.55 J	65 Km	X	X	30 W	Variator of power	80 Ah
CLOVIC 12 GG Code : 76 100 109	12 V	120	10000 V	3.55 J	50 Km	X	X	10 W		80 Ah
CLOVIC 12 Code : 76 100 108	12 V	75	10000 V	2.55 J	25 Km	X	X	10 W	X	60 Ah

3 year warranty



VIC 355 SOLAR 30 W



Delivered with load regulator
Code : 76 100 043

VIC 255 SOLAR 30 W



Delivered with load regulator
Code : 76 100 042

12 VIC GG SOLAIRE 10 W



Code : 76 100 040

VIC 12 SOLAR 10 W



Code : 76 100 039

	Input voltage	Consumption in mA	Voltage	Maximum energy per pulse in Joules	Maximum length of fence	Visual light shows line conditions	Visual light shows voltage of the battery	Solar panel - Power in Watts	Two levels of power	Recommended battery
VIC 355 solaire 30 W Code : 76 100 043	12 V	120/350	15000 V	4.85 J	75 Km	X	X	30 W	Variator of power	80 Ah
VIC 255 solaire 30 W Code : 76 100 042	12 V	80/250	15000 V	4.55 J	60 Km	X	X	30 W	Variator of power	80 Ah
12 VIC GG solar 10 W Code : 76 100 040	12 V	80/120	10000 V	3.55 J	50 Km	X	X	10 W	X	80 Ah
12 VIC solaire 10 W Code : 76 100 039	12 V	40/75	9000 V	2.55 J	25 Km	X	X	10 W	X	60 Ah

3 year warranty

CLOVIC 355 SOLAR 30 W



Delivered with load regulator
Code : 76 100 115

CLOVIC 255 SOLAR 30 W



Delivered with load regulator
Code : 76 100 114

CLOVIC 12 GG SOLAR 10 W



Code : 76 100 113

CLOVIC 12 SOLAR 10 W



Code : 76 100 112

	Input voltage	Consumption in mA	Voltage	Maximum energy per pulse in Joules	Maximum length of fence	Visual light shows line conditions	Visual light shows voltage of the battery	Solar panel - Power in Watts	Two levels of power	Recommended battery
CLOVIC 355 SOLAR 30 W Code : 76 100 115	12 V	120/350	15000 V	4.85 J	75 Km	X	X	30 W	Variator of power	80 Ah
CLOVIC 255 SOLAR 30 W Code : 76 100 114	12 V	80/250	15000 V	4.55 J	65 Km	X	X	30 W	Variator of power	80 Ah
CLOVIC 12 GG SOLAR 10 W Code : 76 100 113	12 V	120	10000 V	3.55 J	50 Km	X	X	10 W		80 Ah
CLOVIC 12 SOLAR 10 W Code : 76 100 112	12 V	75	10000 V	2.55 J	25 Km	X	X	10 W	X	60 Ah

3 year warranty



9/6/12 VIC

Code : 76 100 025



9/12 VIC

Code : 76 100 027



CLOVIC 10

Code : 76 100 087



	Input voltage	Consumption in mA	Voltage	Maximum energy per pulse in Joules	Maximum length of fence	Visual light shows line conditions	Visual light shows voltage of the battery	Solar panel - Power in Watts	Two levels of power	Recommended battery
6/9/12 VIC Code : 76 100 025	6/9/12 V	20/65	6000 V 7500 V	0.5 J 0.8 J	8 Km 20 Km	X		X		50 Ah
9/12 VIC Code : 76 100 027	9/12 V	20/65	7500 V 9000 V	0.5 J 0.7 J	10 Km 25 Km	X		X		50 Ah
CLOVIC 10 Code : 76 100 087	9/12 V	20/65	7500 V 9000 V	0.5 J 0.7 J	10 Km 25 Km	X		X		50 Ah

3 year warranty

6 VIC

Code : 76 100 001



SIC 2

Code : 76 100 050

Input Voltage
12 V / 230 V



	Input voltage	Consumption in mA	Voltage	Maximum energy per pulse in Joules	Maximum length of fence	Visual light shows line conditions	Visual light shows voltage of the battery	Solar panel - Power in Watts	Two levels of power	Recommended battery
SIC 2 Code : 76 100 050	12/230 V	40/120	15000 V	3.2 J	100 Km	X	X	X	X	60 Ah
6 VIC Code : 76 100 001	6 V	65	9000 V	0.7 J	15 Km	X	X			50 Ah

3 year warranty

9 V PIC GREEN 2 LEVELS OF POWER

Code : 76 100 005



9 V PIC 2 LEVELS OF POWER

Code : 76 100 009



9 V PIC

Code : 76 100 006



9 PIC ECO

Code : 76 100 051



	Input voltage	Consumption in mA	Voltage	Maximum energy per pulse in Joules	Maximum length of fence	Visual light shows line conditions	Visual display shows battery level of voltage	Possible to add solar panel	Two levels of power
PIC GREEN 2 levels of power Code : 76 100 005	9	20/30	10000 V	0.7 J	20 Km	X	X		X
9 PIC 2 levels of power Code : 76 100 009	9	20/30	10000 V	0.7 J	20 Km	X			X
9 PIC Code : 76 100 006	9	20	10000 V	0.5 J	15 Km	X	X		
9 PIC ÉCO Code : 76 100 051	9/12	35	6200 V	0.25 J	5 Km				

3 year warranty



VICSOL 7

Code : 76 100 034

With integrated 12 V battery



VICSOL 2

Code : 76 100 045

With integrated 12 V battery

	Input voltage	Consumption in mA	Voltage	Maximum energy per pulse in Joules	Maximum length of fence	Visual light shows line conditions	Visual light shows voltage of the battery	Solar panel - Power in Watts	Two levels of power	Recommended battery
VICSOL 7 Code : 76 100 034	accu 12V 7 Ah	45 mA	10000 V	0.7 J	20 Km	X	X	5 W		
VICSOL 2 Code : 76 100 045	accu 12V 7 Ah	35 mA	6200 V	0.25 J	6 Km	X	X	5 W		

3 year warranty (not for the battery)

FENCING SURVEILLANCE AND ALARMS

SATURNE



Compatible with all mains energisers where the output voltage is higher than 6000 Volts. Monitors line voltage and earth. Warns user of all anomalies in the electric fence system. Signals faults on the line using LED and internal sound alarm.
Options : internal/external sound alarm.

Code : 28 000 491

VIGIFENCE

Vigifence®

Automatic monitoring fence system

Code : 10 000 009

Not available in all countries
Contact us to know more



1 Activate and install Vigifence on the fence

Send alarm through Sigfox network and data analysis

VIGIFENCE ALERTS YOU BY SMS AND PROVIDE FENCE STATUS TO PREVENT RISK ON YOUR LIVESTOCK

2 Receive a status and alerts by SMS in real-time

3 Stay calm with your electric fence

ALARM LIGHT



Externally mounted. Flashing strobe lamp. Input : 12 V. About 85 flashes per minute.

Code : 10 000 552

SIREN



External siren. Sound output : about 105 dB at 1 m. Input : 12 Volts.

Code : 10 000 542

5 W + SUPPORT



Strong aluminium frame.
Integrated fuse.
Dimensions : 400 x 175 mm.
Complete set including support
+ panel + input cable.

Code : 10 000 252

10 W + SUPPORT



Strong aluminium frame.
Integrated fuse.
Dimensions : 382 x 300 mm.
Complete set including support
+ panel + input cable

Code : 10 000 262

20 W + 2 FEET SUPPORT
With load regulator



Cadre alu robuste.
Avec protection.
Régulateur de charge.
Dimensions : 661 x 300 mm.
Livré avec 2 trépieds
+ câble d'alimentation.

Code : 10 000 402

30 W + 2 FEET SUPPORT
With load regulator



Strong aluminium frame.
Integrated fuse.
Load regulator. Dimensions :
635 x 430 mm.
Complete set including 2 feet
support + panel + input cable.

Code : 10 000 512

	5 W	10 W	20 W	30 W
12 VIC		X		
12 VIC G6		X	X	
12 VIC 255			X	X
12 VIC 355			X	X

CLOTSEUL SOLAR PANELS ACCESSORIES

SUPPORT FEET



Bichromated steel feet for solar
panels 5, 10, 20 & 30 W.
2 feet are necessary.

Code : 10 000 562

LOAD REGULATOR



Required from 20 W solar panel.
Prevents overcharge and deep
discharge of the battery.
Weight : 0.165 Kg
Fuse protection.
To be screwed on the solar panel.
Very simple use.

Code : 10 000 382

Maximum power @ 50 ° C	6A
Maximum consumption @ 50 ° C	6A
Input cable	2.5 mm
Protection	IP22
Voltage	12
Disconnection	<11.1 V
Re connection	→12.6 V
Final load voltage	13.7 V
Cycle load starting (14.4 V)	<12.4 V

Output	12 V
Power	max. 60 W
Final voltage	13.7 V
Consumption	0.4 mA

9 V BATTERIES

ALKALINE




200 Ah

Code : 30 000 190



170 Ah

Code : 30 000 192

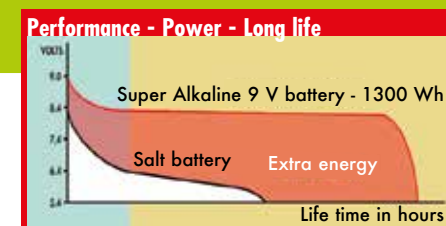

300 Ah
Twice more
autonomy

Code : 30 000 189



130 Ah

Code : 30 000 042

SALT



130 Ah

Code : 30 000 072



90 Ah

Code : 30 000 062

RECHARGEABLE BATTERIES

6 V BATTERY



NCS6 :
Electric fencing dedicated battery.
Deep cycle.
45 Ah.
Size : 167 x 175 x 229 mm.

Code : 20 000 052



NCS12 :
Electric fencing dedicated battery.
Deep cycle. 50 Ah.
Size : 210 x 175 x 185 mm.

Code : 20 000 062

NCS18 :
Electric fencing dedicated
battery. Deep cycle.
60 Ah.
Size : 259 x 173 x 224 mm.

Code : 20 000 152



NCS20 :
Electric fencing dedicated battery.
Deep cycle. 80 Ah.
Size : 280 x 170 x 190 mm.

Code : 20 000 112

GEL BATTERIES

12 Volts. Gel lead batteries.
Waterproof. Long life storage.



12 Ah

Size : 150 x 98 x 95 mm.

Code : 20 000 082



27 Ah

Size : 175 x 170 x 125 mm.

Code : 20 000 092

GEL BATTERY CHARGER



SPECIAL CHARGER FOR GEL BATTERIES
Input 230 V 50 Hz 0.5 A/13.8 V DC,
2.7 A. Usable for gel batteries from 11
to 60 Ah. Able also to recharge usual
lead batteries up to 50 Ah. Indication of the
charge by LED. Connection to the battery by crocodile
clips. FLOATING SYSTEM to maintain a permanent charge
of the battery in winter - totally safe.

Code : 20 000 102

JARDIN

Code : 76 100 029



PIC RANCH

Code : 76 100 060



CLOT'JARDIN

Code : 76 100 086



DOG FENCING KIT

Code : 76 100 681

Packed in plastic shell including :

- 1 energiser Clot Jardin
- 10 plastic posts 0.70 m
- 1 reel of 100 m of Filvert polywire
- 6 m of underground cable
- 1 earth post
- 1 Warning sign
- User guide



	Input voltage	Consumption	Voltage	Maximum energy per pulse in Joules	Energy in Joules - (EU standard)	Maximum length of fence	Visual light shows line conditions
CLOT'JARDIN Code : 76 100 086	230 V	2,5 W	7200 V	1 J	0,85 J	8 Km	X
JARDIN Code : 76 100 029	230 V	2,5 W	7200 V	1 J	0,8 J	8 Km	X
PICRANCH Code : 76 100 060	4 piles 1.5 V LR6 non founies	20 mA	7000 V	0.5 J	0,35 J	2 Km	X

3 year warranty

POLY 15

Reel of 300 m

Code : 47 000 942



STAR HPC

Reel of 400 m

Code : 47 000 700

Reel of 1000 m

Code : 47 000 706



CLOTRESS

Reel of 200 m

Code : 47 000 542

Reel of 400 m

Code : 47 000 552



TRESSE EX30

Reel of 500 m

Code : 47 000 672



CLOTSTAR 30

Reel of 200 m

Code : 47 000 932

Reel of 350 m

Code : 47 000 792




CLOFIX

Reel of 200 m

Code : 47 000 452

Reel of 400 m

Code : 47 001 222



BTRESSE 3

Reel of 400 m

Code : 47 000 170



	Length	Number of conductors	Stainless steel	Copper wire	Breaking strength in Kgs	Electric resistance in Ohm/M
POLY 15	300	15	0.20	0.20	125	0.09
CLOTSTAR 30	200/350	6	0.30		120	1.95
STAR HPC	400/1000	9	HPC 0.30		92	0.078
CLOFIX	200/400	2			120	0.30
CLOTRESS	200/400	6	0.20		130	4.4
BTRESSE 3	400	3	0.25		55	2.20
TRESSE EX30	500	4	0.20		120	5.5



 **CM 4**

Reel of 250 m

Code : 47 000 962

Reel of 500 m

Code : 47 001 242



 **CM 3**

Reel of 250 m

Code : 47 000 952

Reel of 500 m

Code : 47 001 232

 **CLO GREEN**

Reel of 100 m

Code : 47 000 802



 **CLOFLUO**

Reel of 200 m

Code : 47 000 982

Reel of 400 m

Code : 47 000 052



 **CLO INOX 15**

Reel of 250 m

Code : 47 000 062

Reel of 500 m

Code : 47 000 082

 **CLO INOX 20**

Reel of 250 m

Code : 47 000 972

Reel of 500 m

Code : 47 001 252



 **R 9 M**

Code : 47 001 262



 **R 12 M**

Code : 47 001 212



 **R 20 M**

Code : 47 000 102



 **R 40 M**

Code : 47 000 112



 **R 12 F**

Code : 47 000 322



 **BCLOT 12**

Code : 47 000 094

	Length	Number of conductors	Stainless steel	Copper wire	Breaking strength in Kgs	Electric resistance in Ohm/M
CM 3,25	250/500	3	0.20 (2)	0.25 (1)	75	0.30
CM 4	250/500	3	0.20 (1)	0.25 (1)	75	0.20
CLO INOX 15	250/500	3	0.15	0.25 (2)	48	14.7
CLO INOX 20	250/500	3	0.20		51	8
CLOFLUO	200/400	3	0.30 (2)	0.25 (1)	51	3.1
CLO GREEN	100	3	0.20		51	8

	Length	Number of conductors	Stainless steel	Copper wire	Breaking strength in Kgs	Electric resistance in Ohm/M
R 9 M Code : 47 001 262	200	6	0.40 (3)	0.20 (3)	70	0.30
R 12 M Code : 47 001 212	200	6	0.20 (3)	0.20 (3)	70	0.35
R 20 M Code : 47 000 102	200	6	0.20 (3)	0.20 (3)	130	0.40
R 40 M Code : 47 000 112	200	10	0.20 (5)	0.20 (5)	140	0.33
R 12 F Code : 47 000 322	200	4	0.20		80	5.5
BCLOT 12 Code : 40 000 094	200	5	0.20		80	4.56

 TAPE 10 MM

Code : 47 000 732



 TAPE 20 MM

Code : 47 000 742



 TAPE 40 MM

200 m Code : 47 000 752

500 m Code : 47 000 113



 RACING TAPE 20 MM

Reel of 200 m

Code : 47 000 101



Better visibility, better contrast adapted to the vision of animals.

 GREEN TAPE 10 MM

Reel of 100 m

Code : 47 000 812



 NO WIRE TAPE

40 mm Tape without wire.
Uses to bound horse training space.



Width 40 mm.
Reel of 500 m WHITE.

Code : 47 000 852

 TAPEFIX 12



Tape 12 mm
Reel of 200 m
Code : 47 000 090

 TAPE 12 FLUO



Reel of 200 m
Code : 47 001 322

 HIGH CONDUCTIVITY TAPE

 HPC 12

Reel of 200 m

Code : 47 000 093



 HPC 40

Reel of 200 m

Code : 47 000 113



 HPC 20

Reel of 200 m

Code : 47 000 103



		Length	Number of conductors	Stainless steel	Heavy galvanized wire	Breaking strength in Kgs	Electric resistance in Ohm/M
Tape 10	Code : 47 000 732	200	4	0.15		45	10.80
Tape 20	Code : 47 000 742	200	4	0.15		80	10.80
Tape 40	Code : 47 000 752	200/500	5	0.15		90	8.90
TAPEFIX 12	Code : 47 000 090	200	2		0.50	90	0.30
Tape 12 FLUO	Code : 47 001 322	100	3	0.20		51	8
NO WIRE TAPE	Code : 47 000 852	500				140	

		Length	Number of conductors	Stainless steel	HPC High Power Conductivity	Breaking strength in Kgs	Electric resistance in Ohm/M
Racing Tape 20 mm	Code : 47 000 101	200 m	5	0.20		125	4.56
Green Tape 10 mm	Code : 47 000 812	200 m	3	0.20		70	7.4
HPC 12	Code : 47 000 093	200 m	4		0.30	80	0.154
HPC 20	Code : 47 000 103	200 m	6		0.30	125	0.103
HPC 40	Code : 47 000 113	200 m	10		0.30	130	0.068

CLOROPE 6 MM



Code : 47 001 402

CLOROPE BROWN

Reel of 200 m

Code : 47 001 405



ROPE 6 MM



Reel of 200 m

Code : 47 000 152

Reel of 500 m

Code : 47 000 492

ROPE DIAMETER 5 MM 200 M



Code : 47 000 762

ELECTRIFIED BUNGEE ROPE



Diameter 7 mm - Coil of 25 m

Code : 47 001 262

GALVANIZED STEEL WIRE



For permanent fencing
Diameter 1.6 mm, length 300 m
Coil of 5 Kg
Breaking strength 150 Kg.

Code : 40 001 392

Diameter 1.8 mm, length 252 m
Coil 5 Kg
Breaking strength 200 Kg.

Code : 40 000 342

Diameter 2.2 mm, length 168 m
Coil 5 Kg
Breaking strength 210 Kg.

Code : 40 000 344



ALUMINIUM WIRE

Diameter 1.8 mm
Electric resistance 0.016 Ohm/M
Breaking Strength 62 Kg

Reel of 400 m

Code : 47 000 592

Diameter 2.5 mm
Electric resistance 0.003 Ohm/M.
Breaking Strength 118 Kg.

Reel of 400 m

Code : 47 000 362

GALVANIZED CABLE



Diameter 1.2 mm
7 twisted wires
Breaking Strength 180 - 200 Kg
Electric resistance 0.96 Ohm/M.

Reel of 200 m

Code : 40 000 192

Reel of 350 m

Code : 40 000 202

Reel of 500 m

Code : 40 000 212

NEW

DOUBLE TWISTED CABLE



2 galvanized wires 2.4 mm twisted
Length : 200 m

Code : 40 000 341

BARRIER TENSIONER



Heavy galvanizing

Height 1 m (4 lines)

Code : 01 000 012

Height 1.2 m (5 lines)

Code : 01 000 022

BARBED WIRE



2 Wires 1.7 mm
Galvanizing 60-70 g/m2
Coil of 250 m

Code : 40 000 340

2 Wires 2.2 mm
Galvanizing 60-70 g/m2
Coil of 200 m

Code : 40 000 343

2 Wires 2.4 mm
Galvanizing 60-70 g/m2
Coil of 200 m

Code : 40 000 345

NAIL

4.2 x 42 mm
bag of 5 Kg

Code : 50 000 134

3.5 x 35 mm
bag of 5 Kg

Code : 50 000 135



GALVANIZED TENSIONER



N°3

Code : 76 200 282

N°4

Code : 76 200 205

HAND TENSIONER



To tighten manually
any barbed wire

Code : 01 000 050

NEW

		Longueur	Nombre de conducteurs	Inox	Cuivre	Résistance rupture en kgs	Résistance chimique Ohms/M
ROPE Ø 6 (PP)	Code : 47 000 152	200	6	0.20		350	4.4
ROPE Ø 6 (PP)	Code : 47 000 492	500	6	0.20		350	4.4
CLOROPE Ø 6 (PE)	Code : 47 001 402	200	3	0.30		360	3.8
Rope diameter 5 mm 200 m	Code : 47 000 762	200	4	0.20		300	5.55
Electrified bungee rope	Code : 47 001 262	25	3	0.20			
CLOROPE BROWN	Code : 47 001 405	200	3	0.30		360	3.8

SHEEP NET

Code : 02 000 012



3 stainless steel wires 0.20 mm
Welded meshes
Length : 50 m
Height : 0.90 m
14 posts
1 repair kit

GOAT NET

Code : 02 000 022



3 stainless steel wires 0.20 mm
Welded meshes
Length : 50 m
Height : 1.08 m
14 posts
1 repair kit

RABBIT NET ORANGE


Code : 02 000 042



3 stainless steel 0.20 mm
Welded meshes
Length : 50 m
Height : 0.65 m
14 posts
1 repair kit

RABBIT NET GREEN

Code : 02 000 055

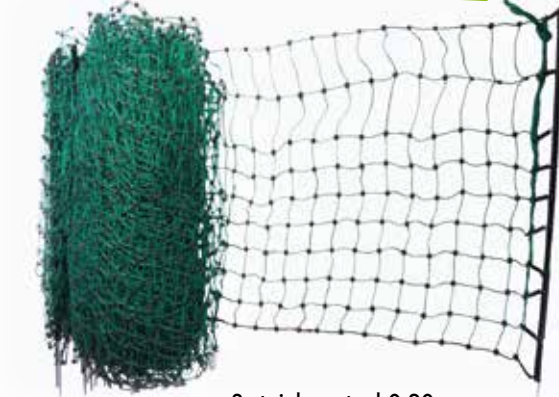

3 stainless steel 0.20 mm
Welded meshes
Length : 50 m
Height : 0.65 m
14 posts
1 repair kit

POULTRY NET

Red :

Code : 02 000 032

Green :

Code : 02 000 031



Welded meshes
Length : 50 m
Height : 1,12 m
14 posts - double prong
1 repairing kit



DOUBLE PRONG

N 1985



Screw-in insulator with reinforced screw.

Bag of 25 pieces

Code : 76 200 542

Bucket of 100 pieces

Code : 76 201 172

Bucket of 250 pieces

Code : 76 201 132

N 2001



Standard screw-in insulator with reinforced screw.

Neutral bag of 25 pieces

Code : 17 000 392

L 1987



Square-hook screw-in insulator.
With anti-wear eye hole.

Bag of 25 pieces

Code : 76 200 008

Bucket of 100 pieces

Code : 76 200 192

N 60



Screw-in insulator with reinforced screw.
Diameter of the screw : 6 mm.

Bag of 25 pieces

Code : 76 200 262

Bucket of 100 pieces

Code : 76 200 245

Bucket of 250 pieces

Code : 76 200 273

O 1905



Black oval screw-in insulator for wire, polytape up to 12.5 mm & rope up to 6 mm.
Anti-wear eye hole.

Bag of 25 pieces

Code : 76 200 531

Bucket of 100 pieces

Code : 76 200 521

N 1988 SV



Self-tapping screw-in insulator.
Black.
Softer plastic.
Very strong.

Bag of 25 pieces

Code : 76 201 081

100 pieces

Code : 76 200 391

250 pieces

Code : 76 200 211

N 1984



Black screw-in insulator.
Bag of 25 pieces

Code : 76 202 282

100 pieces

Code : 76 200 441

250 pieces

Code : 76 200 971

N 80



Screw-in insulator with reinforced screw.
Diameter of the screw : 6 mm.

Bag of 25 pieces

Code : 76 200 315

Bucket of 100 pieces

Code : 76 200 417

Bucket of 250 pieces

Code : 76 200 505


JC 83



Curved yellow screw-in insulator.

Bag of 25 pieces

Code : 76 201 342

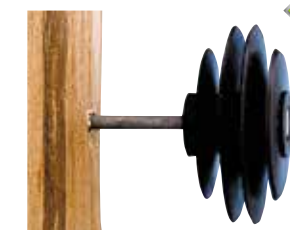

ELFIX
Wood post insulator, including galvanized nail.
Bag of 50 pieces
Code : 76 200 601

BLACK MAV

Heavy duty insulator for better strain.
Can be used in corners or for the connections of two wires coils
Black



Bag of 10 pieces
Code : 76 200 010

MAV + HOOK

Code : 50 000 272



WHITE MAV

Heavy duty insulator for better strain.
Can be used in corners or for the connections of two wires coils
White



Bag of 10 pieces
Code : 76 200 501

A 1993

Stand-off screw-in insulator.
For polytapes, polywires and polyropes.
Length 220 mm.
Screw diameter 6 mm.

Bag of 10 pieces
Code : 76 201 212



40 pieces
Code : 76 201 512

A 2010

Stand-off screw-in insulator.
For polytapes, polywires and polyropes.
Length 220 mm.

Bag of 15 pieces
Code : 76 201 542



75 pieces
Code : 76 201 222

E240

Nail-on stand-off insulator.
Pigtail.
Length 240 mm.

Bag of 10 pieces
Code : 76 200 872



A 1010

Sachet de 25 pièces
Code : 76 200 526

Isolateur écarteur pour piquet bois, fil et corde.
Longueur 150 mm.



CR 180

Stand-off screw-in insulator.
For polytapes, polywires and polyropes.
Length 220 mm.
Screw 6 mm.

Bag of 10 pieces
Code : 76 201 242



C 2870

Visible hook screw-in insulator

Bag of 25 pieces
Code : 76 200 252



All our insulators are UV protected.



R 4000


Special insulator for up to 40 mm polytape and up to 6 mm polyrope.
For wooden post or concrete post. Triple water drainage.



Black
Bag of 25 pieces
Code : 76 200 014
Bucket of 100 pieces
Code : 76 200 352



Brown
Bag of 25 pieces
Code : 76 200 524
Bucket of 100 pieces
Code : 76 201 253

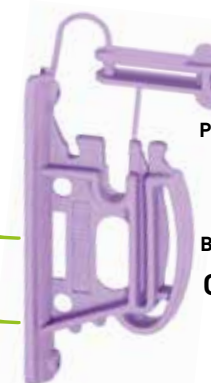

Purple
Bag of 25 pieces
Code : 76 200 523



ELRUB

Constant tension insulator.
Closing system with 2 screws.

Bag of 10 pieces
Code : 76 200 215



ELRUBBER

Constant tension insulator.
Closing system with 2 screws.
With rubber.

Bag of 10 pièces
Code : 76 200 461



CR 40

Self-tapping screw

Self-tapping screw-in insulator, for up to 40 mm polytape and up to 6 mm polyrope.
For wooden post or concrete post.
Triple water drainage.

Bag of 25 pieces
Code : 76 200 007
100 pieces
Code : 76 200 511



AN 40

Corner insulator.
For polytape up to 40 mm.
Delivered with 2 wood screws.

Bag of 10 pieces
Code : 76 200 261

AP 40

Tape buckle insulator.

Skinpack of 2 pieces
Code : 76 200 515



DPR 40

Tape buckle and gate insulator.
For polytape up to 40 mm.

Skinpack of 2 pieces
Code : 76 200 024



Delivered with 2 wood screws.

TD 40

Triple connections insulaor.
For polytape up to 40 mm.

Skinpack of 2 pieces
Code : 76 200 411
Delivered with 2 wood screws.



DR 40

Double connections insulaor.
For polytape up to 40 mm.

Skinpack of 2 pieces
Code : 76 200 025



Delivered with 2 wood screws.

All our insulators are UV protected.

A 6000



Corner insulator for polytape up to 60 mm, with 2 buckles.
Skinpack of 2 pieces
Code : 76 200 881
Bulk 1 piece
Code : 17 000 272

A 4060



Corner insulator for polytape up to 60 mm.
Skinpack of 2 pieces
Code : 76 200 871
Bulk 1 piece
Code : 17 000 282

ITR 40



Tape insulator
Tape up to 40 mm
Fixed by wood-screw (not included)
Shell of 4 pieces
Code : 76 200 944

RBL



Tie on insulator with metal lock pin to secure the line. To be fixed on wooden post by a small piece of wire (not included).
Bag of 25 pieces
Code : 76 200 182
Bag of 100 pieces
Code : 76 200 662

P 800



Pigtail insulator for wooden post.
Delivered with 1 nail.
Bag of 25 pieces
Code : 76 200 692

A3P



Anchor insulator.
For wooden post.
To attach 3 gate break handles.
Skinpack of 2 pieces
Code : 76 200 027

3188




Screw-in corner insulator.
Bag of 25 pieces
Code : 76 200 412

B 220



Pigtail insulator for wooden post.
Bag of 25 pieces
Code : 76 201 102

IP

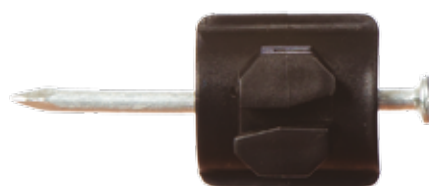

Line insulator for wooden post.
Delivered with 1 nail.
Code : 76 200 945

LONG STAND OFF BRACKET E 300



Long stand-off insulator, 300 mm.
For wooden post and concrete post.
Bulk
Code : 17 000 362

The only insulator that protect the post



ELCO P1

Insulator pin with long wire guide to protect the fence post diam 12.

Bag of 10 pieces
Code : 76 200 541

50 pieces
Code : 76 201 051

ELMAX 12



Heavy duty plastic insulator for steel or wooden post.
For polywire and polyrope up to 14 mm and polytape up to 12.5 mm.
- Triple water drainage.
- Passage for wire reinforced.

Bag of 25 pieces
Code : 76 200 981

100 pieces
Code : 76 200 991

V 1505



Adjustable position polywire insulator.
Suitable for all fence posts up to a diameter of 14 mm.

Bag of 25 pieces
Code : 76 200 322

80 pieces
Code : 76 200 421

IC12



For steel post of diameter 12 mm

Bag of 50 pieces

Code : 76 200 006

150 pieces
Code : 76 201 562

Diameter 6 bag of 50 pieces : **Code 76 200 009**
Diameter 8 bag of 50 pieces : **Code 76 201 208**
Diameter 10 bag of 50 pieces : **Code 76 200 015**
Diameter 14 bag of 50 pieces : **Code 76 201 214**
Diameter 16 bag of 50 pieces : **Code 76 201 216**
Diameter 19 bag of 25 pieces : **Code 76 201 219**

V 1540



Adjustable position polytape insulator.
Suitable for all fence posts up to a diameter of 14 mm.

Bag of 15 pieces
Code : 76 200 312

60 pieces
Code : 76 200 381

All our insulators are UV protected.



F1172



Multi purpose insulator.
For steel post up to diameter 12 mm
and all wooden posts.

Bag of 25 pieces

Code : 76 200 002

Bag of 100 pieces

Code : 76 200 001

ELMAX 12 R



Heavy duty plastic insulator for
steel or wooden post.
For polywire and polyrope up to
6 mm and polytape up to 40 mm.
Triple water drainage.
Passage for wire reinforced.

Bag of 25 pieces


Code : 76 200 012



100 pieces

Code : 76 201 001

UNV11

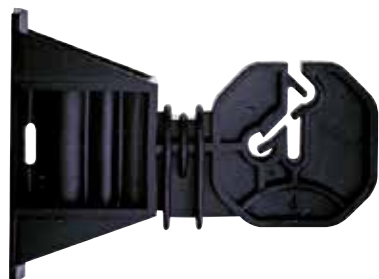

Adjustable position wooden
or concrete post insulator.
Also usable on steel post of 6 & 12 mm,
even for oval post.

Bag of 10 pieces

Code : 76 200 711

ELCLIP



For fiber glass post.
Made in stainless steel.
Adjustable position.

Bag of 50 pieces

Code : 50 000 545

ELCO DP2



Steel post insulator

Bag of 2 pieces

Code : 76 200 451

PELCO



Pulley insulator for
corners.

Bag of 10 pieces

Code : 76 200 961

5012/40



Pig tail insulator.
For tape up to 40 mm.
Usable on post of 12 mm.

Bag of 25 pieces

Code : 76 201 122

F 90




Stand-off insulator for polytape and ropes.
Screw and nut for T post.
Length : 220 mm.

Bag of 10 pieces

Code : 76 200 023

E 4000

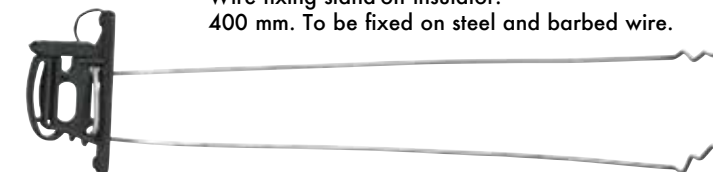

Wire fixing stand-off insulator.
400 mm. To be fixed on steel and barbed wire.

Unit - bulk

Code : 22 001 021

P 300



Porcelain insulator
30 x 30 mm.

Bag of 25 pieces

Code : 76 201 492

T50

Stand off T post insulator
For T post 35 x 35 mm maximum

Bag of 15 pieces

Code : 76 200 525

T 3010



T post insulator

Bag of 25 pieces

Code : 76 200 022

F 88



Screw-in insulator.
For T post and concrete post.
Length : 40 mm
Screw thread 3.5 mm

Bag of 25 pieces

Code : 76 200 016

V 2000



In line insulator for
oval post.
Bag of 25 pieces

Code : 76 200 682

RBU



Nail on insulator with with pin lock.
Fastened by 2 nails (not included).
Usable also on wood post and steel post diameters
10 & 12 mm.

Bag of 50 pieces

Code : 76 200 202

V 3000




Steel oval post insulator.
Bag of 25 pieces



Code : 76 200 105

Blocfil system®.

For attaching and picking the wire from the ground without stooping

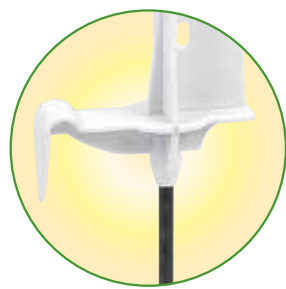

Registered design

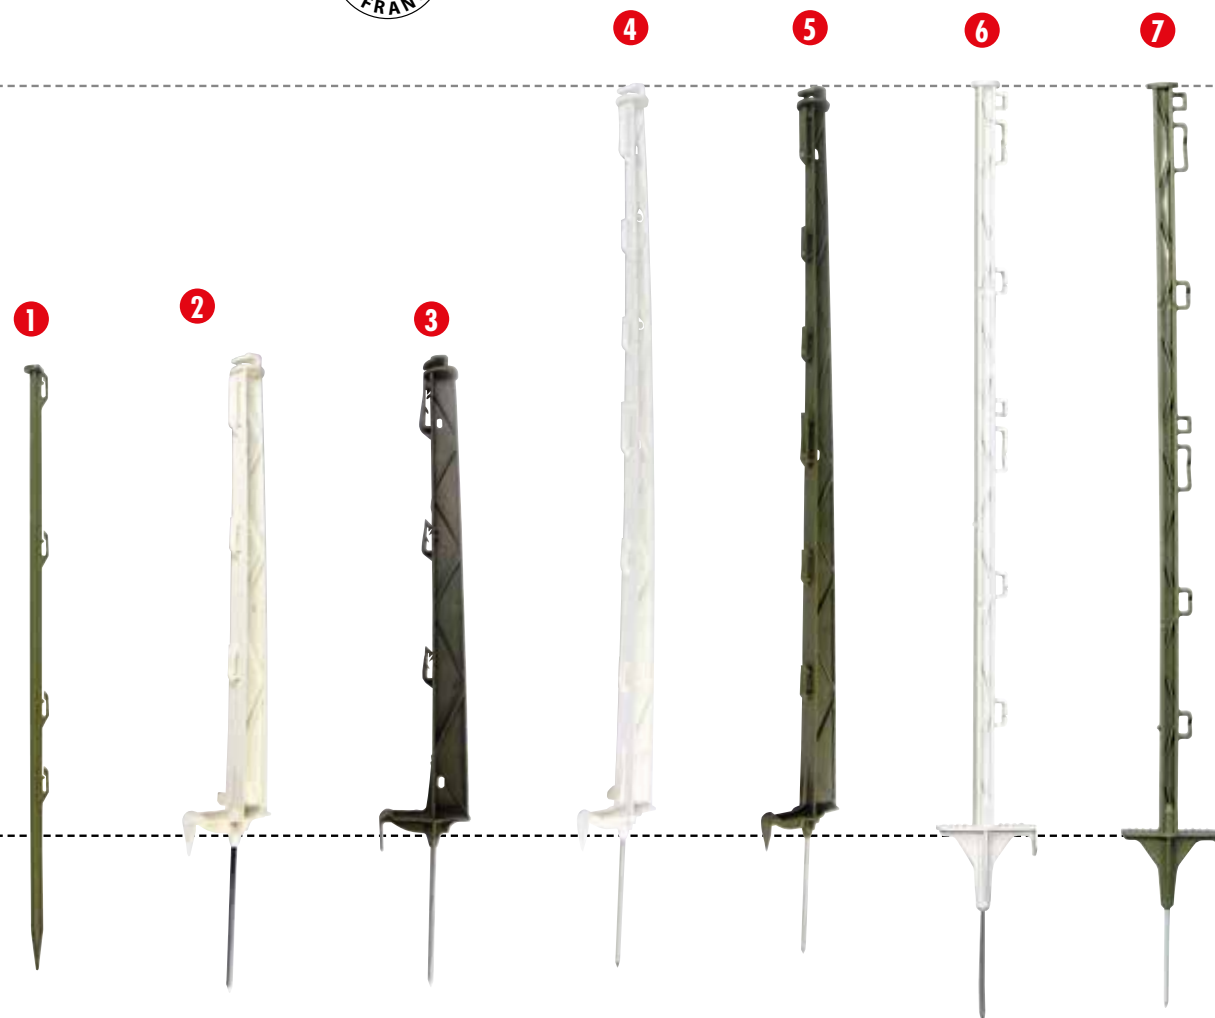

DOG KIT POST

1 4 insulators
Total height : 0.72 m
Code : 07 000 302

BLOCFIL POST 70 CM



2 70 cm White 4 insulators
Code : 08 000 231
3 70 cm Green 4 insulators
Code : 08 000 121

BLOCFIL POST 105 CM

4 105 cm White 7 insulators
Code : 08 000 241
5 105 cm Green 7 insulators
Code : 08 000 081

DB POST 105 CM

6 Double spike white 5 insulators
Code : 07 000 022
7 Double spike green 5 insulators
Code : 07 000 032

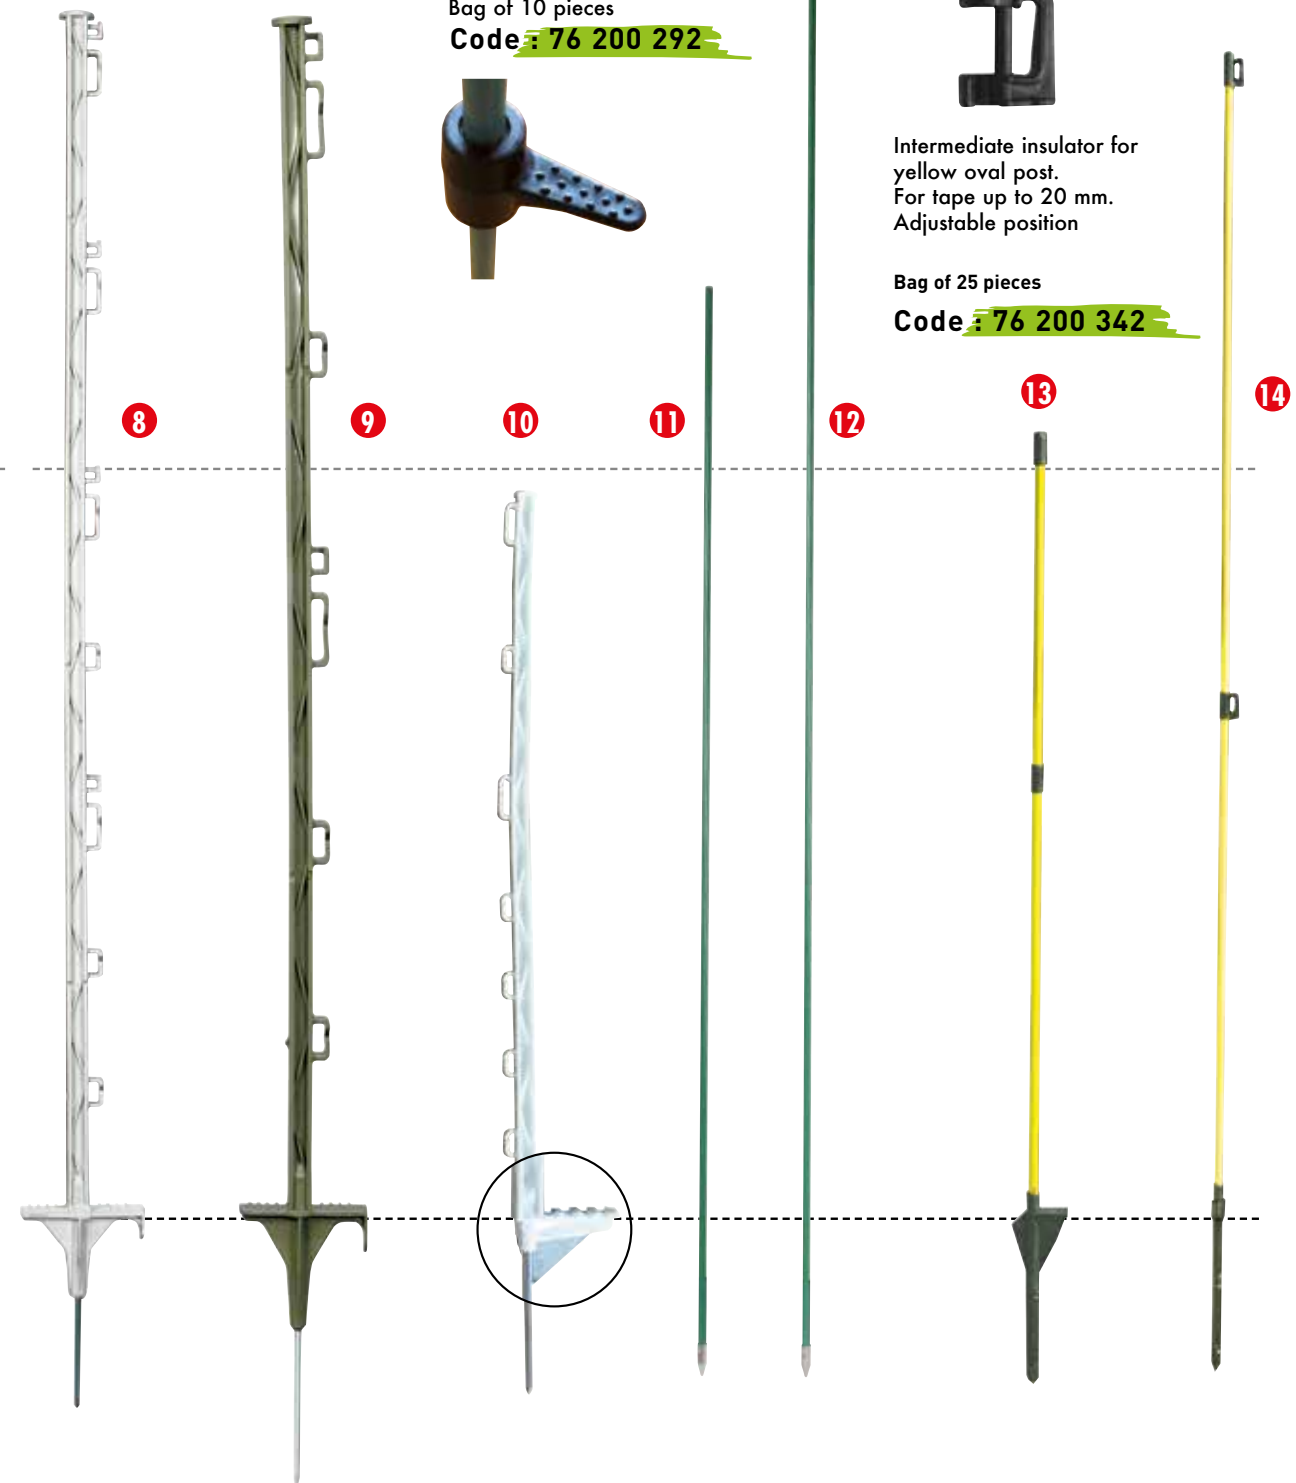

FOOT FOR POST

For fiberglass post.
Adjustable position.
Bag of 10 pieces
Code : 76 200 292



V 4000



Intermediate insulator for yellow oval post.
For tape up to 20 mm.
Adjustable position

Bag of 25 pieces
Code : 76 200 342

DB POST 160 CM

8 Double spike white 8 insulators
Code : 07 000 042
9 Double spike green 8 insulators
Code : 07 000 392

BR POST 105 CM

10 With reinforced spike. 7 insulators
Code : 07 000 262

BR POST 150 CM

With reinforced spike. 8 insulators
Code : 07 000 272

FIBREGLASS POST DIAMETER 10 MM 120 CM

11 Code : 07 000 282

FIBREGLASS POST DIAMETER 10 MM 160 CM


12 Code : 07 000 432

OVAL POST FIBREGLASS 110 CM

13 Code : 07 000 352

OVAL POST FIBREGLASS 150 CM

14 Code : 07 000 362

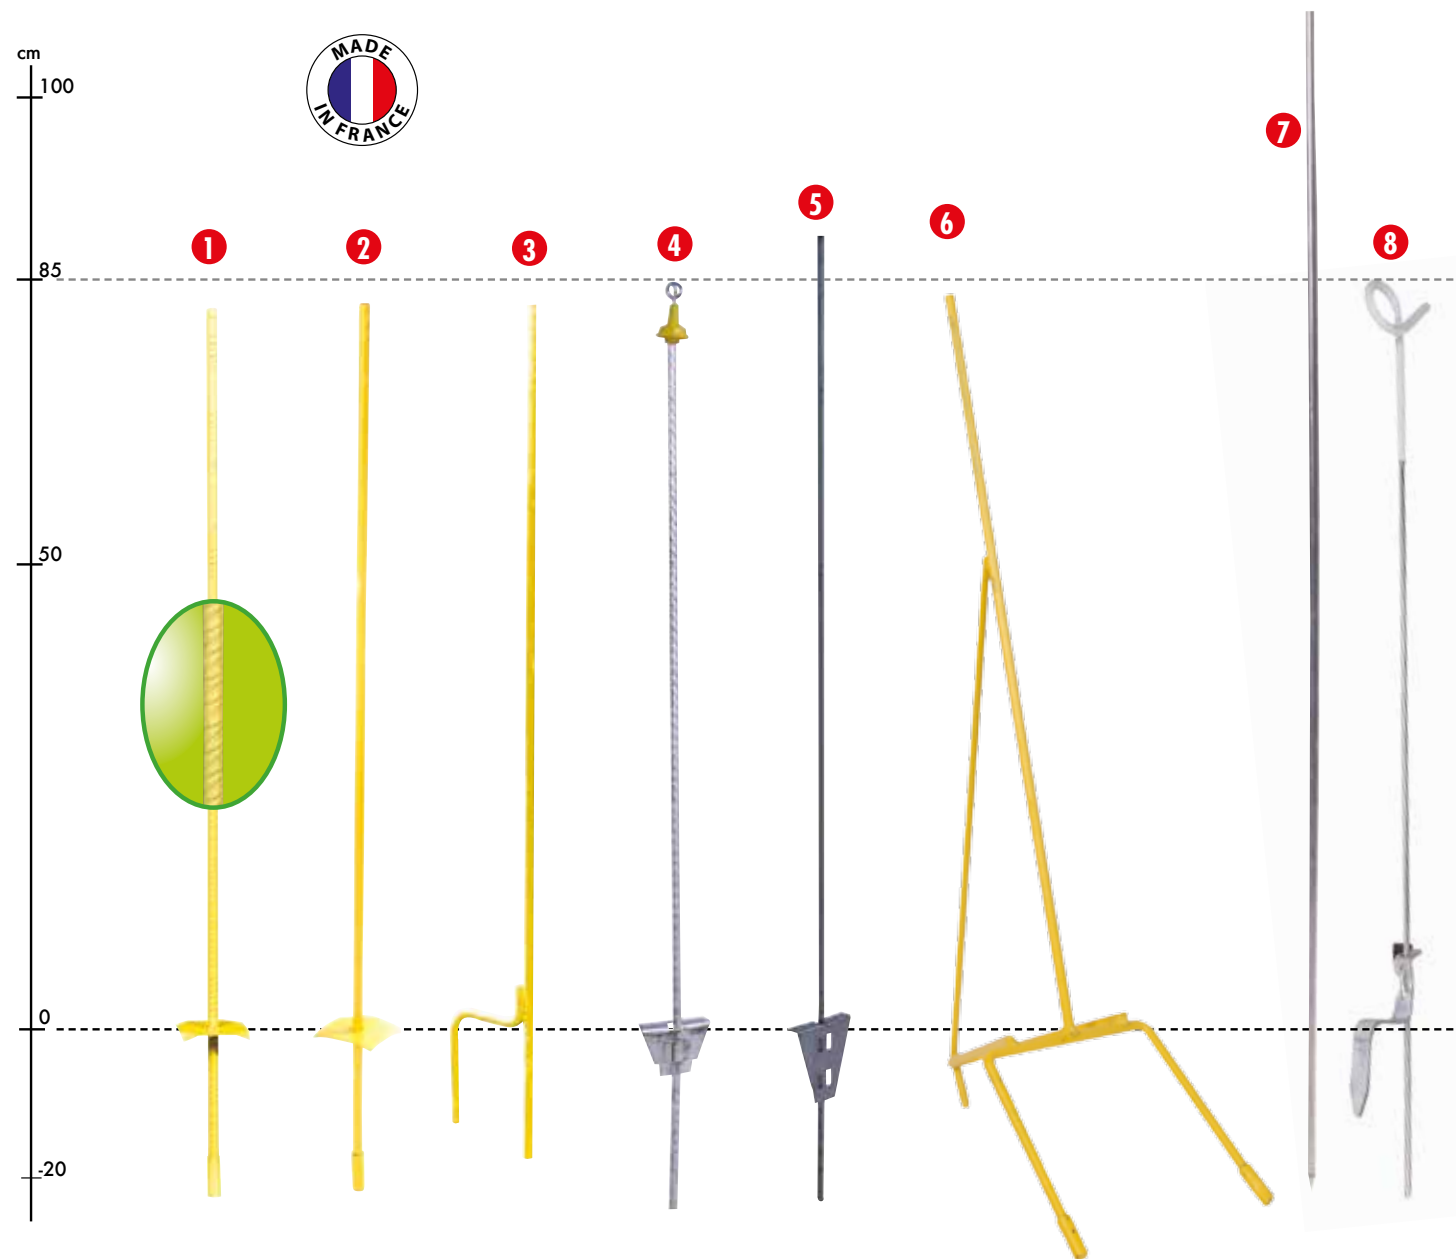

**RIBBED IRON POST
DIAMETER 12 MM**

- 1** 1.00 m Code **07 000 382**
1.20 m Code **07 000 152**

ELCO 80 P 1

- 2** Fence steel post diam 12 mm delivered with insulator Elco p1.
Code **08 000 151**

ELCO 80 without insulator
Fence steel post diam 12 mm.
1.00 m Code **08 000 221**
1.20 m Code **07 000 092**

PO-ID

- 4** Flexible oval steel post with insulator.
1.05 m
Code **07 000 012**

PELCO 80

- 6** PELCO 80 without insulator
Corner fence steel post
Unit - bulk
Code **08 000 131**

**STEEL POST
DIAMETER 12 MM**

- 3** 1.00 m Code **07 000 112**
1.20 m Code **07 000 122**

PA6

- 5** Steel post diameter 6 mm, very strong.
Height 1.10 m.
Code **07 000 052**

**ALUMINIUM
POST**

- 7** 1.10 m.
Foldable.
Code **07 000 400**

F6

- 8** Pigtail post Total height 1 m
Out of ground height 0.85 m
Double spyke
Code **07 000 401**



PROFESSIONNAL

Braided fluorescent polywire to replace a damaged one.
Spool of 200 m

Code **40 002 322**

V3 GEARED REEL

V3 Reel with 3:
1 gear ratio and 1000 m capacity.
Can be fixed on 12 mm post or on the wire.
For right and left handed.



SUPER ELK

For right of left hander.
Capacity 1500 m.
Reel stop system.
Motion break.

AUTOSTAR 65

Code **21 000 261**

Automatic reel 65 m.
With anti-return system to stop the wire in case of broken wire.
Electric input in the middle of the reel to prevent the electrical and radio disturbances.
Wall and tube fastening system.



AUTOSTAR TAPE

Code **76 200 255**

With 15 m of 40 mm polytape



Code **21 000 251**

Replacement reel
Code **21 000 091**



MAXI ELK

Capacity 1000 m.
Reel stop system.
Motion break.
Anti-return system.

Code : 21 000 151

Replacement reel
Code : 21 000 161



ELK

Capacity 500 m.
Reel stop system.
Motion break.
Anti-return system

Code : 21 000 101

Replacement reel
Code : 21 000 141




ELK DUO

NEW

To spool 2 wires at the same time.
Capacity 2 x 500 m
Reels stop system
Motion break
Anti-return system

Code : 21 000 105

Replacement reel
Code : 21 000 145

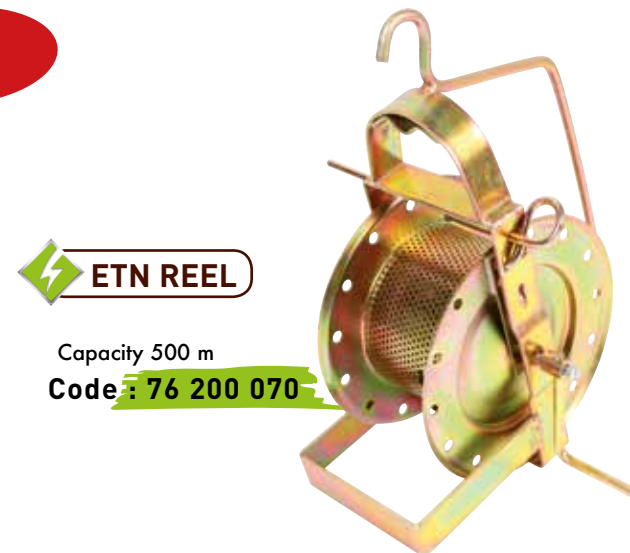

ETN REEL

Capacity 500 m
Code : 76 200 070

STRAP REEL



Capacity 1500 m
Reel stop system

Code : 21 000 191

Replacement reel
Code : 21 000 091

MINI ELK



Capacity 500 m
Reel stop system
Anti-return system

Code : 21 000 271

Replacement reel
Code : 60 000 142



C3 REEL

Ergonomic hand holding
UV protected
For right and left handed
For polytape and polywire
Fastening on steel post diameter 12 mm
Reel stop system

Capacity 500 m

Code : 21 000 201

Replacement reel

Code : 60 000 142

C3 REEL WITH WIRE



Including 500 m of Clotinox
20/100 polywire

Code : 21 000 231



C5

Capacity 350 m.
Auto-ratchet for mounting on
12 mm diameter post.
Reel stop system

Code : 60 000 022

Replacement reel

Code : 60 000 152



C10

Capacity 1000 m.
Auto-ratchet for mounting on
12 mm diameter post.
Reel stop system.

Code : 60 000 032

Replacement reel

Code : 60 000 162

SMALL AUTOMATIC REEL USED FOR GATE - WITH ROPE



For gates up to 10 m

Code : 76 200 615

SMALL AUTOMATIC REEL USED FOR GATE - WITH 40 MM TAPE



For gates up to 6 m

Code : 76 200 640

TRIPOD REEL



Capacity 500 m

Code : 60 000 222

Pulley in procelain

Code : 60 000 242

C30



Capacity 1000 m

Code : 60 000 182

Replacement reel

Code : 60 000 192

PMAX

High quality gate handle for a perfect insulation on both sides.
Easy to keep in hand. Internal compression spring.
Smooth plastic with high resistance.
UV protected.



Very strong - orange

Bulk 1 piece

Code: 16 000 222



Very strong - black

Bulk 1 piece

Code: 16 000 452



PMAX TAPPE

Very strong - khaki

Bulk 1 piece

Code: 16 000 252

PBI

High UV protection.
Inside spring.
Smooth plastic - very strong.

NEW HOOK



Black

Bulk 1 piece

Code: 50 000 222

Bag of 5 pieces

Code: 50 002 002



Orange

Bulk 1 piece

Code: 16 000 112

Bag of 5 pieces

Code: 50 001 082



Khaki

Bulk 1 piece

Code: 16 000 102



Green apple

Bulk 1 piece

Code: 16 000 015



Purple

Bulk 1 piece

Code: 16 000 025



Yellow

Bulk 1 piece

Code: 16 000 015



Pink

Bulk 1 piece

Code: 16 000 014

NEW

4006 L



Tape gate handle.
For tape up to 40 mm.

Bulk 1 piece

Code: 16 000 012

HOOK 208

UV protected
Strong and easy hand holding



Steel spring
Bulk 1 piece

Code: 76 200 030

Stainless steel spring

HERCULE

High UV protection.
Perfect insulation on both sides.



Orange
Bulk 1 piece

Code: 16 000 032



Black
Bulk 1 piece

Code: 50 001 062

PMAX KIT

Code: 76 200 171



PBI KIT

Code: 76 200 036



HERCULE KIT

Code: 76 200 901



HERCULE + SPRING

Strong gate handle with up to 5 m spring.
Spring diameter : 23 mm.

Code: 76 200 122



**GALVANIZED SPRING
DIAMETER 23 MM**

Spring up to 5 m long.
Diameter 23 mm

Code: 50 001 272



**GALVANIZED SPRING
DIAMETER 52 MM**

Spring up to 5 m long.

Code: 50 000 242




NEW

Spring up to 7 m long.

Code: 50 000 241

BUNGEE KIT

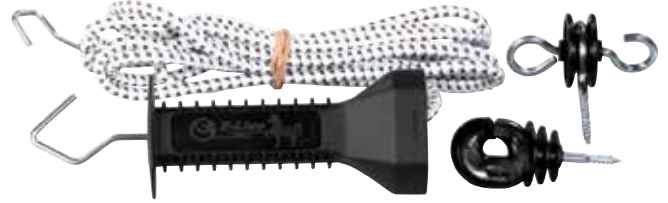

Code: 76 200 035 Complete kit including : gate handle + bungee fencing rope. Up to 7 m long

KIT ELAS

Code: 76 200 132

Gate handle with braided spring. Up to 7 m long. Prevent horses from snagging their tail in the gate. Complete kit with gate handle and 2 insulators A4021

AUTOMATIC BARRIER

Code: 01 000 062

- Opens by simply pushing on the arm.
- Automatic closing.
- Extrimities protected - does not scratch.
- Composit arms electrified.
- For door of 2 m to 4,2 m.



A 4021

2 directions anchor with wood screw

Skinpack of 2 pieces

Code: 76 200 017

Bulk 1 piece

Code: 50 000 972

4021 F

2 directions anchor with wood screw

Skinpack of 2 pieces

Code: 76 201 551




4021 L

2 directions anchor with tape buckle to polytape up to 40 mm

Skinpack of 2 pieces

Code: 76 200 581

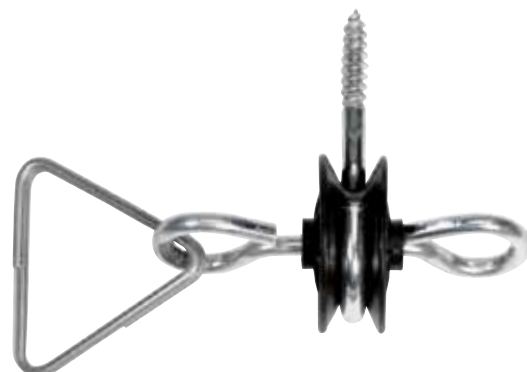

TESTER C15000



ABS anti-shock plastic. 6 control level indicators. 3 uses : energisers, fencing line and earth testing. Only for electric fencing. Up to 15000 V

Code: 76 200 085

BIPER

Make a sound at each pulse No contact with the fence line Bulk 1 piece

Code: 76 200 809



VERY HIGH TENSION COPPER UNDERGROUND CABLE

Twisted copper wire diameter 8 mm. High tension up to 20000 Volts. To connect the energiser to the fence line. Can be used on or under the ground.



25 m **Code: 40 000 722**
50 m **Code: 40 000 392**
100 m **Code: 40 000 402**
500 m **Code: 40 000 622**

MULTI TEST



Electronic wire-free tester. Indicates current, voltage and direction fault.

Code: 14 001 481

WIRE FREE DIGITAL ELECTRONIC TESTER



Weight 180 Gr.

Code: 14 001 471

END OF FENCE LINE TESTER



Code: 76 200 084

DIGITAL VOLTMETER



Numerical display. Especially designed for fence testing. Up to 10000 V.

Code: 76 201 131

VERY HIGH TENSION GALVANIZED WIRE UNDERGROUND CABLE

Double sheath cable Galvanized wire diameter 2.5 mm



25m : **Code: 40 000 400**
50m : **Code: 40 000 406**
100m : **Code: 40 000 399**

CUT OUT SWITCH

Can be used as a cut out switch fence line



Code: 76 200 118

UNDERGROUND CABLE CONNECTION



Shell of 2 pieces
CAN BE USED UNDERGROUND AND IMMERSABLE
Code: 76 200 749




LIGHTNING PROTECTION

Code: 76 200 087

LINES CONNECTORS

High tension wire to connect two wires fencing lines. Wire diameter 5 mm.

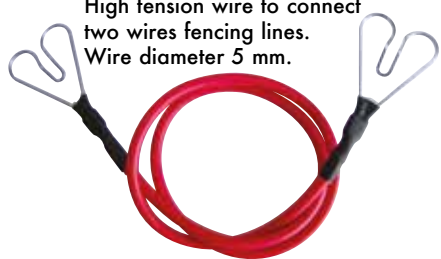

Skinpack 1 piece
Code : 76 200 994

WIRE CONNECTION

To connect the energiser to the fence line. Wire diameter 5 mm
Skinpack 1 piece



Code : 76 200 993

WIRE JOINER



For 5 mm diameter wire to be set.
Skinpack of 10 pieces


Code : 76 200 092



For 3 mm diameter wire to be set.
Skinpack of 10 pieces

Code : 76 200 088

LINES CONNECTORS

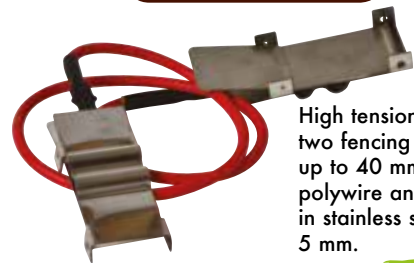

High tension wire to connect two fencing lines. For polytape up to 40 mm. Usable also for polywire and polyrope. Made in stainless steel. Wire diameter 5 mm.

Code : 76 200 864

TAPE ENERGIZER CONNECTION



To connect the energiser to the fence line. For polytape up to 40 mm, polywire and polyrope. Wire diameter 5 mm.

Code : 76 200 096

TAPE JOINING

Stainless steel



For polytape up to 20 mm
Skinpack of 5 pieces

Code : 76 201 451



For polytape up to 40 mm
Skinpack of 5 pieces

Code : 76 201 461

CLIPS



To maintain polytape
Skinpack of 15 pieces

White :
Code : 14 000 924

Green :
Code : 14 000 923

Brown :
Code : 14 000 925

ROPE CONNECTOR



For 6 mm rope
Skinpack of 5 pieces

Code : 76 200 114

For 3 mm rope
Skinpack of 5 pieces

Code : 76 200 115

UNIVERSAL INSULATOR FITTER



Code : 76 200 093


FENCE LINE TO UNDERGROUND CABLE CONNECTION



Skinpack of 2 pieces

Code : 76 200 860

QUICK INSULATOR FITTER

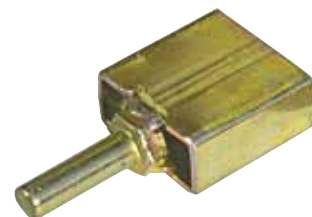

Code : 76 200 102

EARTH POST

T design for a better contact with the earth
Steel post 35 x 35 mm
Galvanized
Height : 1 m

Code : 07 000 332



Diameter 7 mm
Height : 0.30 m
Zinc protection

Code : 18 000 291

BENTONITE



Special Bentonite bucket. To optimize earthing of the fence when it's dry or when the earth is not good. Bucket of 4.5 kg.

Code : 76 200 950

GROUND WIRE 1.50 M



Code : 76 200 113

STAINLESS STEEL TRIANGLE FOR POLYTAPE



Up to 20 mm
Skinpack of 5 pieces

Code : 76 200 111

Up to 40 mm
Skinpack of 5 pieces

Code : 76 200 110

SPRING + MAV

Stainless steel spring



Compression spring only. To compensate the tension of a wire fencing line.


Code : 76 201 211

Compression spring + MAV insulator. To compensate the tension of a wire fencing line

Code : 76 201 201

AUGER

For wooden posts. To make holes easily. Can be used for fencing but also for horticulture needs

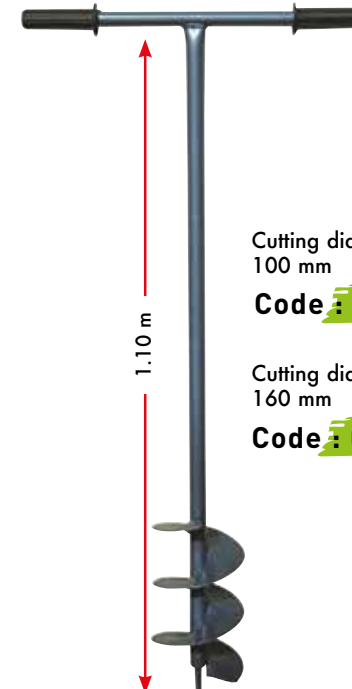


Cutting diameter : 100 mm

Code : 01 000 042

Cutting diameter : 160 mm

Code : 01 000 032

FENCING PLIERS

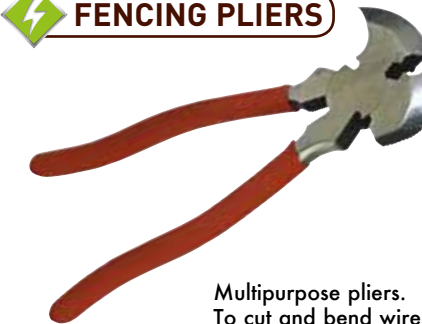

Multipurpose pliers. To cut and bend wire or remove nails.

Code : 01 000 052

WIRE TENSIONER

Skinpack of 3 pieces

Code : 76 200 117



WARNING SIGN



One Warning Sign must be placed every 10 m in clear view of the public
Bulk 1 piece

Code : 76 200 825



SIC 15
Code : 76 100 102



SIC 10
Code : 76 100 104



VERY HIGH TENSION GALVANIZED WIRE UNDERGROUND CABLE

Galvanized wire diameter 2,5 mm

25 m :
Code : 40 000 400

50 m :
Code : 40 000 406

100 m :
Code : 40 000 399

EARTH POST

T design for a better contact with the earth.
Steel post 35 x 35 mm
Galvanized
Height : 1 m

Code : 07 000 332

BENTONITE

Special Bentonite bucket.
To optimize earthing of the fence when it's dry or when the earth is not good.
Bucket of 4.5 kg.

Code : 76 200 950

KWIKLOC

To connect 2 wires and to **disconnect** them easily **WITHOUT** cutting any.



For galvanized wire up to 2.5 mm	Skin of 4 pieces	Code : 14 001 431
For galvanized wire up to 3.5 mm	Skin of 4 pieces	Code : 14 001 441
For galvanized wire up to 3.5 mm	Skin of 4 pieces	Code : 14 001 511

INSULATED TUBE FOR HIGH SECURITY WIRE

Coil of 12 m

Code : 50 000 305

Coil of 100 m

Code : 50 000 295

10 cm piece
Bag of 50 pieces

Code : 76 200 325

HIGH TENSION GALVANIZED WIRE



For permanent fences.
Diameter 2.5 mm
Breaking strength 125-150 Kgs.
Coil of 25 Kg / about 625 m.

Code : 40 000 712

Diameter 1.6 mm
Breaking strength 110-130 Kgs.
Coil of 25 Kg / about 1525 m.

Code : 40 000 772

IPC



Delivered with nail.
Bag of 50 pieces

Code : 76 200 943



ELCLAV

Pin-lock insulator.
For permanent fence.
Easy to lock and unlock fence wire.
UV protection.
For wire up to 6 mm

Bag of 25 pieces

Code : 76 201 111

ALUMINIUM LINE STRAINER



Made of alloy of aluminium
Skinpack of 2 pieces

Code : 76 200 313



PLASTIC LINE STRAINER

Made in polycarbonate
Heavy duty
Skinpack of 2 pieces

Code : 76 200 091



HANDLE FOR PLASTIC STRAINER

Code : 17 000 382

UNWINDER



For galvanized wire

Code : 60 000 202

WHITE MAV



Heavy duty insulator for better strain.
Can be used in corners or for the connections of two wires coils. White.

Bag of 10 pieces

Code : 76 200 501

BLACK ELPER



Insulator for permanente fence
Heavy duty
For wood post

Bag of 25 pieces

Code : 76 201 011

Bucket of 100 pieces

Code : 76 201 031

COMPRESSION SPRING

Compensates the mechanical tension of the wire that may change dependaing of the external temperature (summer/winter).
Length of the spring : 240 mm
Diameter of the spring : 43 mm.

Code : 16 000 042



STRAINER

Code : 01 000 055



STRAINER + INSULATOR



Bulk 1 piece

Code : 01 000 057



All our insulators are UV protected.



CLOTSEUL

WWW.CLOTSEUL.FR

FRENCH MANUFACTURER SINCE 1938



**Z.A. du Calvaire
14230 Isigny-sur-Mer FRANCE**

Tél. 33 (0)2 31 51 20 54

Fax 33 (0)2 31 51 20 55

**www.clotseul.fr
clotseul@orange.fr**

DEALER

Conception et impression www.toiledecom.fr - Photos non contractuelles
Ne pas jeter sur la voie publique. La société CHAPRON LEMENAGER se réserve
le droit de modifier les caractéristiques techniques afin d'améliorer leurs produits.